Data sheet

LED Downlight SDR-070/6W




Product

Model name	SDR-070
Maker	Stardust LED
Voltage	AC 85V~265V (50 / 60 Hz)
Power Consumption	6W
Driver	Include
Product	LED Downlight



Dimensional drawing (unit:mm)

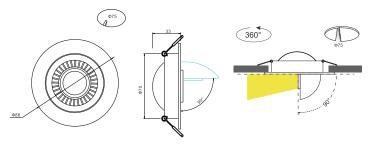

Through the unique structural design, it can be rotated 360° and retracted by 50°, which is convenient for irradiation, and the CRI can be selected as 80/90. The room temperature is optional (2700K/3000K/4000K/5000K), which increases the illumination range of the lamp and is more convenient to use.

The LED recessed spots are presented in a simple design. The built-in spots are pleasantly modern and discreet. LED recessed spotlights are light sources that can be used universally and can be installed in the living room, office, bedroom, kitchen, hallway or stairwell.















Lighting Data





Specifications

R-070
)-540lm
60Hz
x. 200mA
9
)
n-Dimmable / Dimmable
℃~+48℃
000hrs
00K~5000K
)Ra
14
0X70mm
minium
2KG
+
Wh/1000h

Application

 Retail shop, apartment, living room, home, kitchen hallway and stairwell




LED Downlight SDR-070/6W


Beam Angle

Installation Instruction

 Drill a right hole where need to install downlight. Trun off the powerswitch, connect operating voltage.




2. Put up spring dump before installing the downlight.







3. Insert the LED downlight to the hole like the picture schows.



4. Completed the installation.





Contact

Stardust Lighting Co., Ltd



+86-757-82226490



+86-757-86408550



postmaster@stardust-lighting.com



www.stardust-lighting.com



Cross of Shangbo, Nanhai Luocun Town, Foshan China 528226

